

DOW CORNING® MB50-011

Masterbatch

FEATURES

- Imparts processing improvements and modified surface characteristics

BENEFITS

- Improved throughput
- Reduced energy consumption
- Enhanced scratch resistance
- Improved slip properties
- Reduced waste
- Enhanced stability vs. traditional processing aids and lubricants

COMPOSITION

- Solid pellets

Ultra-high molecular weight siloxane polymer dispersed in nylon 6

APPLICATION

- Additive in nylon-compatible systems.

TYPICAL PROPERTIES

Specifications writers: These values are not intended for use in preparing specifications. Please contact your local Dow Corning sales representative prior to writing specifications on this product.

Property	Unit	Value
Appearance		Off-white pellets
Siloxane content	%	50
Organic resin		Low viscosity, general purpose nylon 6
Suggested use level (0.1 to 5% siloxane)		0.2 to 10

DESCRIPTION

DOW CORNING MB50-011 Masterbatch is a pelletized formulation containing 50% of an ultra-high molecular weight siloxane polymer dispersed in nylon 6. It is designed to be used as an additive in most nylon-compatible systems to impart benefits such as processing improvements and modification of surface characteristics.

Liquid siloxane plastic additives have been used for several years to improve the lubricity and flow of thermoplastics. They are effective in this role although some difficulties have been experienced in the incorporation of liquids into thermoplastic melts without the use of specialized equipment. It has also been difficult to produce masterbatches with greater than 20% liquid siloxane because of processing difficulty and bleed problems.

The DOW CORNING® MB Series Masterbatches address these problems

by supplying a high concentration of an ultra-high molecular weight siloxane as a dispersion in a dry pellet form in a variety of thermoplastics.

BENEFITS

When added to nylon or similar thermoplastics at 0.1% to 1.0% siloxane, improved processing and flow of the resin is expected, including better mold release and faster throughput. At higher addition levels, 1% to 5% siloxane, improved surface properties are expected, including lubricity, slip, lower coefficient of friction, and greater mar and abrasion resistance. The DOW CORNING MB Series Masterbatches are expected to give improved benefits compared to conventional lower molecular weight siloxane additives, e.g. less screw slippage, improved release, a lower coefficient of friction, fewer paint and printing problems, and a broader range of performance capabilities.

The addition of 2%

polydimethylsiloxane gives a significant reduction in wear rate, as shown in Table 1. While this data was obtained with a lower molecular weight siloxane additive, similar results are expected when DOW CORNING MB50-011 Masterbatch is added to nylon. Figure 1 shows that an ultra-high molecular weight siloxane additive in nylon 6,6 has a small effect on tensile and impact strengths. Figure 2 shows a significant effect on coefficient of friction values.

LIMITATIONS

This product is neither tested nor represented as suitable for medical or pharmaceutical uses.

HOW TO USE

DOW CORNING MB Series Masterbatches may be processed in the same way as the thermoplastics on which they are based. Sufficient DOW CORNING MB50-011 Masterbatch should be blended with virgin polymer pellets to give the desired siloxane level in the final product. DOW CORNING MB50-011 Masterbatch pellets can be added during compounding in a single screw extruder or added at the feed hopper during injection molding or extrusion.

HANDLING PRECAUTIONS

PRODUCT SAFETY INFORMATION REQUIRED FOR SAFE USE IS NOT INCLUDED. BEFORE HANDLING, READ PRODUCT AND SAFETY DATA SHEETS AND CONTAINER LABELS FOR SAFE USE, PHYSICAL AND HEALTH HAZARD INFORMATION. THE SAFETY DATA SHEET IS AVAILABLE FROM YOUR LOCAL DOW CORNING SALES REPRESENTATIVE.

USABLE LIFE AND STORAGE

When stored at or below 35°C (95°F) in the original unopened containers DOW CORNING MB50-011 Masterbatch has a usable life of 48 months from the date of production.

PACKAGING

This product is available in a variety of container sizes. Contact your local Dow Corning sales representative for information about container sizes available in your area.

HEALTH AND ENVIRONMENTAL INFORMATION

To support customers in their product safety needs, Dow Corning has an extensive Product Stewardship organization and a team of Health, Environment and Regulatory Affairs specialists available in each area.

For further information, please consult your local Dow Corning representative.

WARRANTY INFORMATION - PLEASE READ CAREFULLY

The information contained herein is offered in good faith and is believed to be accurate. However, because conditions and methods of use of our products are beyond our control, this information should not be used in substitution for customer's tests to ensure that Dow Corning's products are safe, effective, and fully satisfactory for the intended end use. Dow Corning's sole warranty is that the product will meet the Dow Corning sales specifications in effect at the time of shipment. Your exclusive remedy for breach of such warranty is limited to refund of purchase price or replacement of any product shown to be other than as warranted. Dow Corning specifically disclaims any other express or implied warranty of fitness for a particular purpose or merchantability. Unless Dow Corning provides you with a specific, duly signed endorsement of fitness for use, Dow Corning disclaims liability for any incidental or consequential damages. Suggestions of use shall not be taken as inducements to infringe any patent.

Table 1: Effect of siloxane on wear.

Resin type	% Siloxane	Wear ¹ (50FPM, 100psi)
Nylon	0	28.0
Nylon	2	0.4

¹in x 0.001/hr

Figure 1: Effect on physical properties of Nylon 6.6.


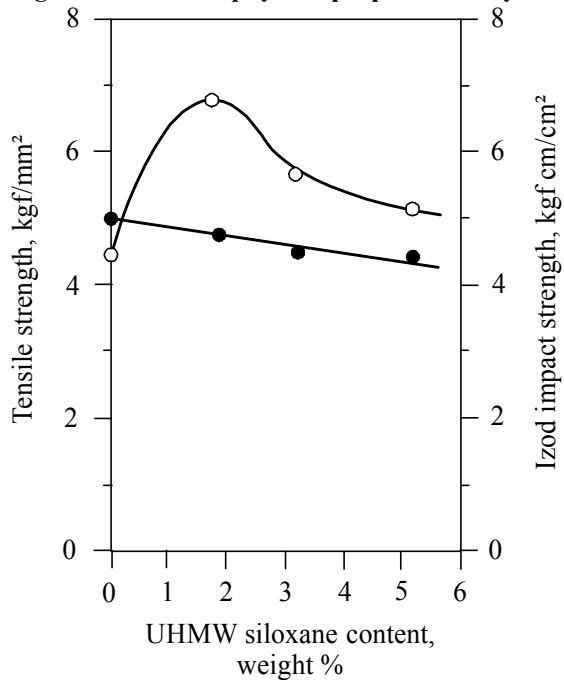


Figure 2: Coefficient of friction of Nylon 6.6 vs. UHMW siloxane content.

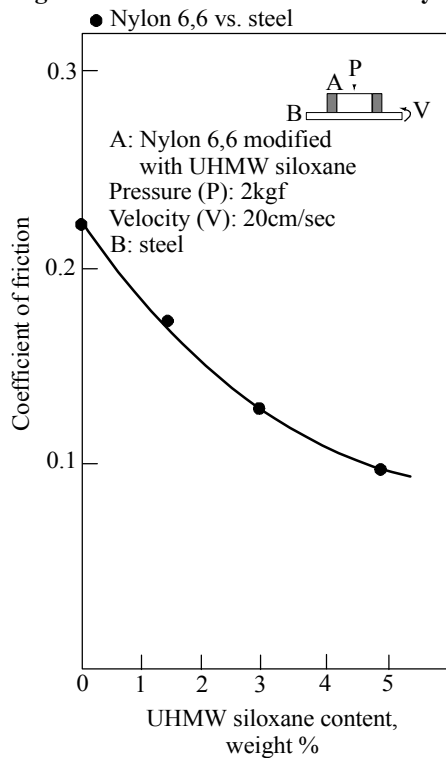

Your Global Connection

At home or abroad - wherever your business takes you - you'll find the product supply, customer service and technical support you need to succeed available locally from Dow Corning. Whether you face a challenge that could benefit from Dow Corning's international experience, or you need a reliable, local source of supply for innovative solutions, just pick up the phone and call us. To consult Dow Corning web site, type: www.dowcorning.com

DOW CORNING AMERICAS

North America

Dow Corning Corporation
Tel.: +1 517 496 6000
Fax: +1 517 496 8026
Toll free from USA:
1 800 248 2481

Canada

Dow Corning Canada, Inc.
Tel.: +1 905 826 9600
Fax: +1 905 858 6005
Toll free from Canada:
1 800 248 2481

Mexico

Dow Corning de Mexico
Tel.: +525 327 1300
Fax: +525 327 1327

South America

Dow Corning do Brasil Ltda.
Tel.: +55 11 3759 4300
Fax: +55 11 3758 5727
Toll free from
Colombia: 9809 12 0276
Venezuela: 880 12112

Argentina

Dow Corning de Argentina
S.A.I.C.
Tel.: +54 11 4814 9600
Fax: +54 11 4816 6119

DOW CORNING ASIA

Australia & New Zealand

Dow Corning Australia Pty Ltd.
Tel.: +61 1300 360 732
Fax: +61 1300 650 785

China (Chengdu)

Dow Corning China Ltd.
Tel.: +86 28 661 9678
Fax: +86 28 661 6756

China (Shanghai)

Dow Corning China Ltd.
Tel.: +86 21 6249 2316
Fax: +86 21 6249 2317

Indonesia, Singapore, Malaysia & Philippines

Dow Corning Singapore Pte Ltd.
Tel.: +65 253 6611
Fax: +65 253 6070

Japan

Dow Corning Toray Silicone
Co Ltd.
Tel.: +81 3 3287 1011
Fax: +81 3 3287 1201

Taiwan (Chungli)

Dow Corning Taiwan Inc.
Tel.: +886 3 462 0534
Fax: +886 3 462 0552

Thailand

Dow Corning (Thailand) Ltd.
Tel.: +66 2 634 7078 to 7088
Fax: +66 2 634 7077

China (Beijing)

Dow Corning China Ltd.
Tel.: +86 10 6500 3051
Fax: +86 10 6504 5652

China (Hong Kong)

Dow Corning Asia
Tel.: +852 2835 0350
Fax: +852 2836 6650

India

Dow Corning India Ltd.
Tel.: +91 22 444 3820
Fax: +91 22 444 3485

Japan

Dow Corning Asia Ltd.
Tel.: +81 3 3287 1141
Fax: +81 3 3287 1088

Korea

Dow Corning Korea Ltd.
Tel.: +82 2 551 7600
Fax: +82 2 551 6800

Taiwan (Taipei)

Dow Corning Taiwan Inc.
Tel.: +886 2 2713 6936
Fax: +886 2 2717 2209

DOW CORNING EUROPE

Germany, Austria, Switzerland & Eastern Europe

Dow Corning GmbH
GERMANY
Tel.: +49 (0)611 - 23 70
Fax: +49 (0)611 - 237 610
E-mail: katja.bechstein@dowcorning.com

France & North Africa

Dow Corning France S.A.
Tel.: +33 (0)4 72 84 13 60
Fax: +33 (0)4 72 84 13 79

Italy & Eastern Mediterranean Countries

Dow Corning S.p.A.
ITALY
Tel.: +39 039 - 60 711
Fax: +39 039 - 68 996 60

Poland

Dow Corning Polska Sp. zo.o.
Tel.: +48 (0)22 645 14 46
Fax: +48 (0)22 645 14 40

United Kingdom, Eire, Nordic Countries, Benelux, South Africa & Middle East

Dow Corning Ltd.
UNITED KINGDOM
Tel.: +44 (0)1 676 52 80 00
Fax: +44 (0)1 676 52 80 01

Spain & Portugal

Dow Corning Ibérica S.A.
SPAIN
Tel.: +34 93 36 36 900
Fax: +34 93 36 36 901